


SPECIFICATION CONTROL DRAWING

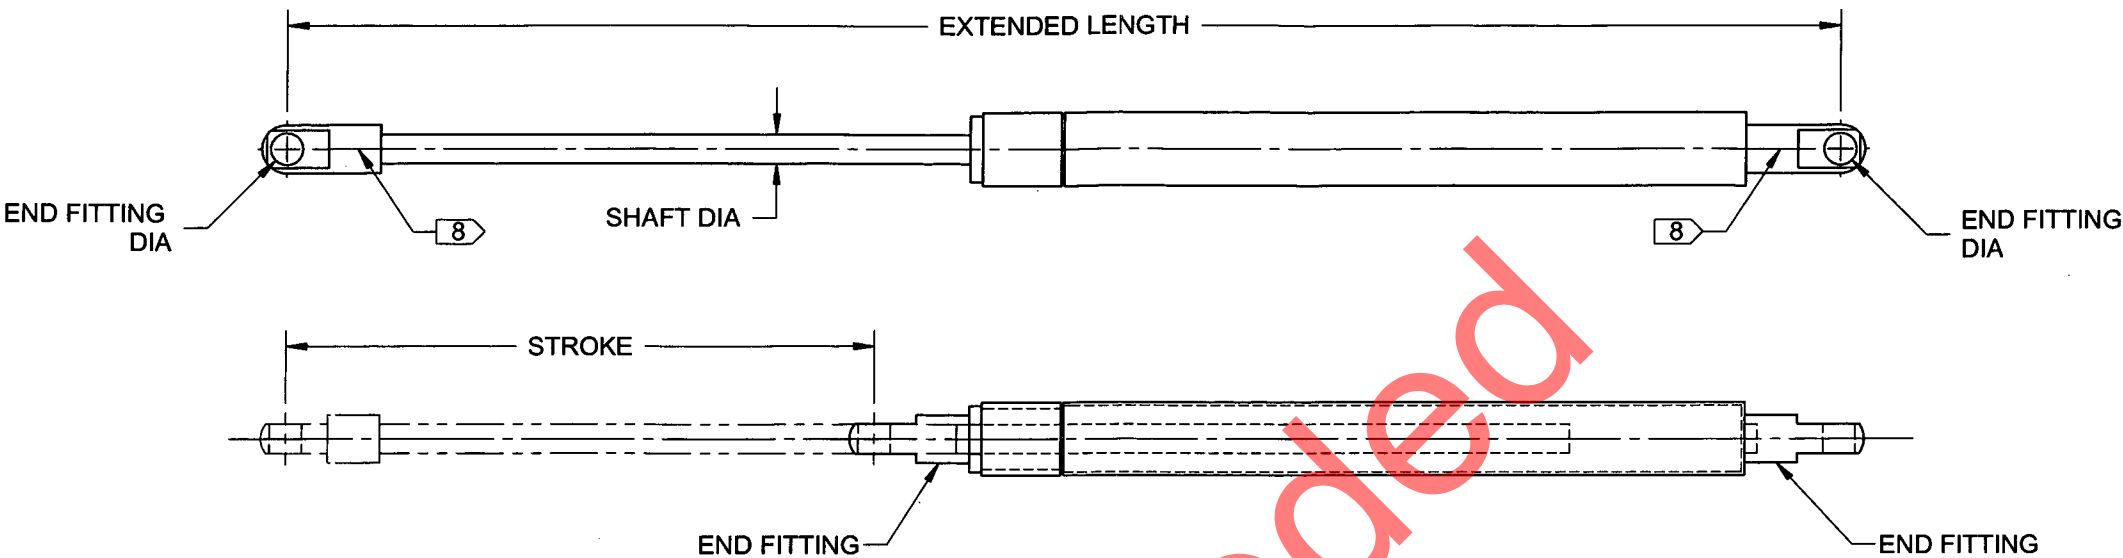

D3969-X SPRING

DART PART NUMBER	STROKE (mm/in)	EXTENDED LENGTH (mm/in)	SHAFT DIA (mm/in)	FORCE (N/lbs)	END FITTING TYPE	END FITTING DIA (in)	CASING MATERIAL	PREFERRED SUPPLIER	SUPPLIER PART NUMBER	WEIGHT APPROX
D3969-1	122/4.80	315/12.40	6/0.24	310/69.7	BLADE	0.257	STAINLESS STEEL	LS TECHNOLOGIES	SSA4/6-122-315-310N	0.27 lbs
D3969-3	122/4.80	315/12.40	8/0.31	360/80.9	BLADE	0.257	STAINLESS STEEL	LS TECHNOLOGIES	SSA4/8-122-310-360N	0.32 lbs
D3969-5	122/4.80	315/12.40	6/0.24	133/29.7	BLADE	0.257	STAINLESS STEEL	LS TECHNOLOGIES	SSA4/6-122-315-133N	0.27 lbs
D3969-7	122/4.80	315/12.40	6/0.24	222/50.0	BLADE	0.257	STAINLESS STEEL	LS TECHNOLOGIES	SSA4/6-122-315-225N	0.27 lbs
D3969-9	130/5.12	343/13.50	8/0.31	360/80.9	BLADE	0.257	STAINLESS STEEL	LS TECHNOLOGIES	SSA4/8-130-343-360N	0.35 lbs

- NOTES:
- 1) MATERIAL: SEE CHART
  - 2) FINISH: N/A
  - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
  - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
  - 5) BREAK SHARP EDGES: N/A
  - 6) IDENTIFICATION: IDENTIFY WITH DART P/N "D3969-X" AND B/N USING FINE POINT PERMANENT INK MARKER
  - 7) WEIGHT: SEE CHART
  - 8) CRIMP END FITTING AT APPROXIMATE LOCATION SHOWN, PER MANUFACTURERS REQUIREMENTS

D	ADDED -7/-9	ML	16.05.12
C	REDRAWN IN SW. ADDED -3 & -5; ADDED SHAFT DIA COLUMN TO CHART. FORCE FOR -1 CORRECTED (WAS 60.0 lbs ).	JPH	10.03.04
B	DRAWING RENAMED WAS: GAS SPRING (BASKET LID). NOTE 8 ADDED.	AJS	09.11.10
A	NEW ISSUE	AJS	09.07.27
REV.	DESCRIPTION	BY	DATE
DESIGN	AS	<b>DART AEROSPACE LTD</b> HAWKESBURY, ONTARIO, CANADA	
DRAWN	ML		
CHECKED	AJS	DRAWING NO.	REV. D
MFG. APPR.	DD	D3969	SHEET 1 OF 1
APPROVED	WM	TITLE	SCALE
DE APPR.	DS	BASKET LID SPRING	NTS
DATE	16.05.12	COPYRIGHT © 2009 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

RELEASED 2016-05-19

APPROVED